



Lower bolt, gap 12 mm

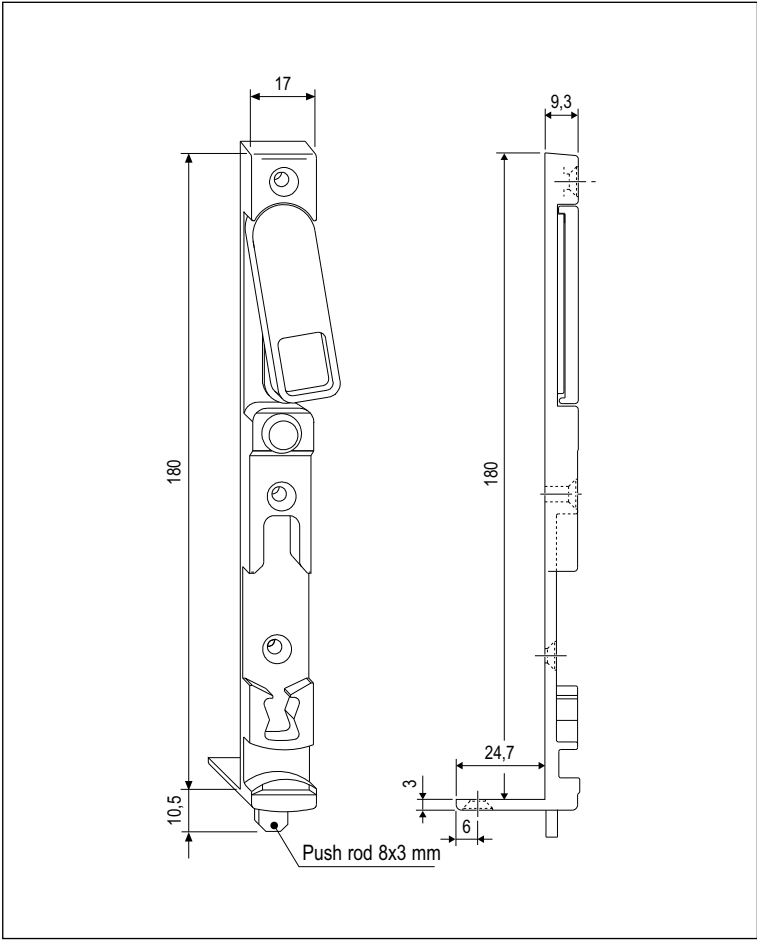

Description


Lower bolt with 11 mm throw, including tilt striker and two-handed control lever.

Application

For all types of double-sash tilt & turn windows, gap 12 mm, with roller cam and tilt pin mounted on the stile. It must be used in combination with espagnolettes with fixed handle height, or espagnolettes with variable handle height if they are connected with the tilt terminals art. A40481.00.01 or A40481.00.02. The shape of the lower fastening bracket ensures the perfect coupling with the adjustable strikers to prevent sash sagging.

Fastening

Use 4x30 mm screws with thread suitable for the window material.

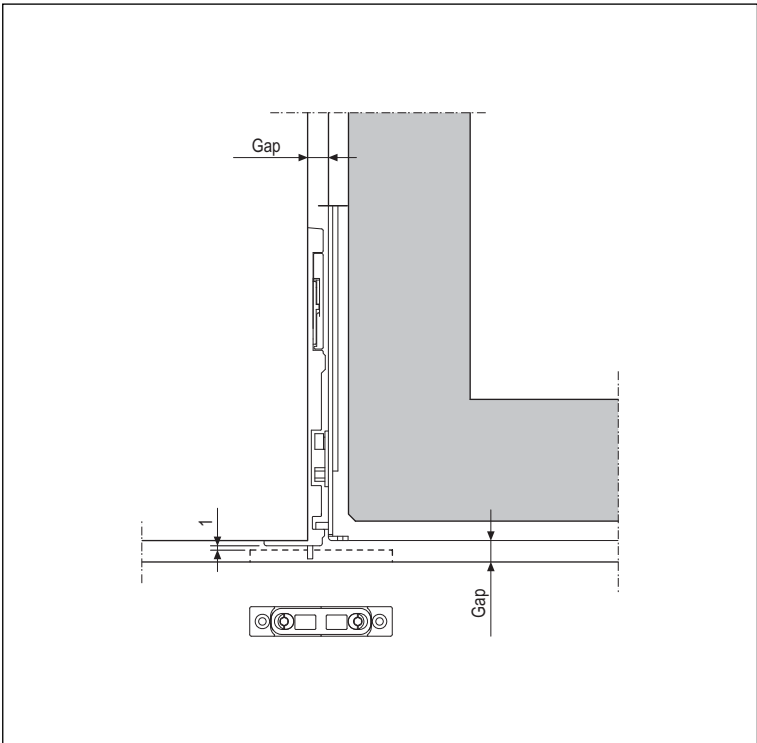

Screw hole position		
GR1		
	A-B ref.	A-D ref.
1°	40	18,7
2°	85	-
3°	172	-

Order Specifications

Article		
A40036.05.01	17X180X9,5	1