



Upper bolt, gap 12 mm

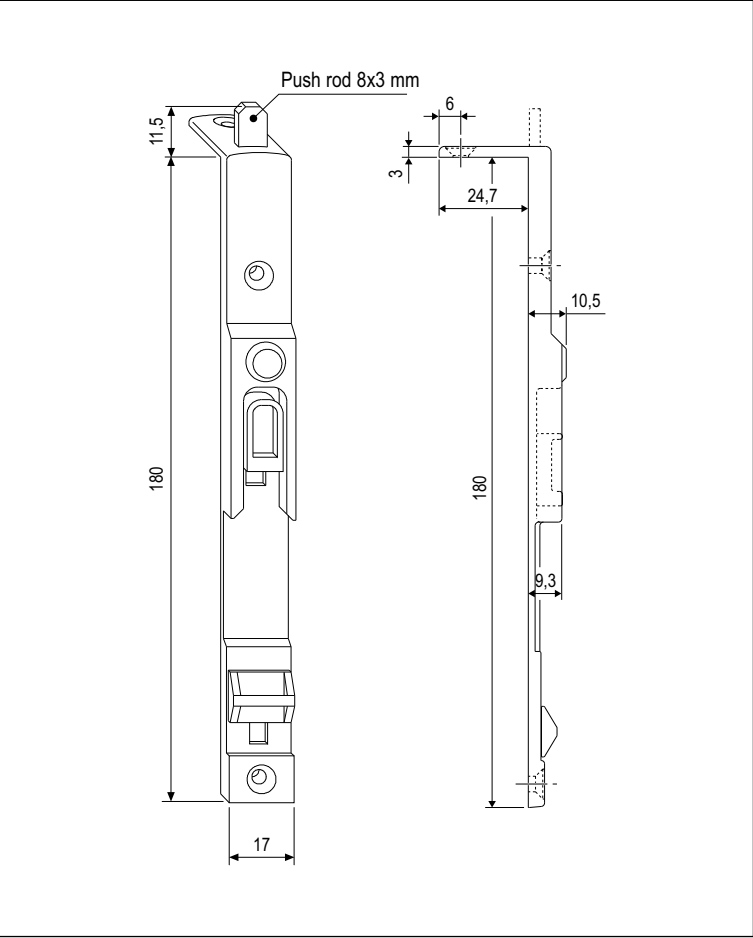

Description


Upper bolt with 11 mm throw, including roller cam striker and automatic fastening device.

Application

For all types of double-sash tilt & turn systems, gap 12 mm, requiring the fastening of the receiving sash to the head jamb. It must be used on arched windows and on all the traditional systems that feature corner movements without push rods or fastening points on the upper rail.

Fastening

Use 4x30 mm screws with thread suitable for the window material.

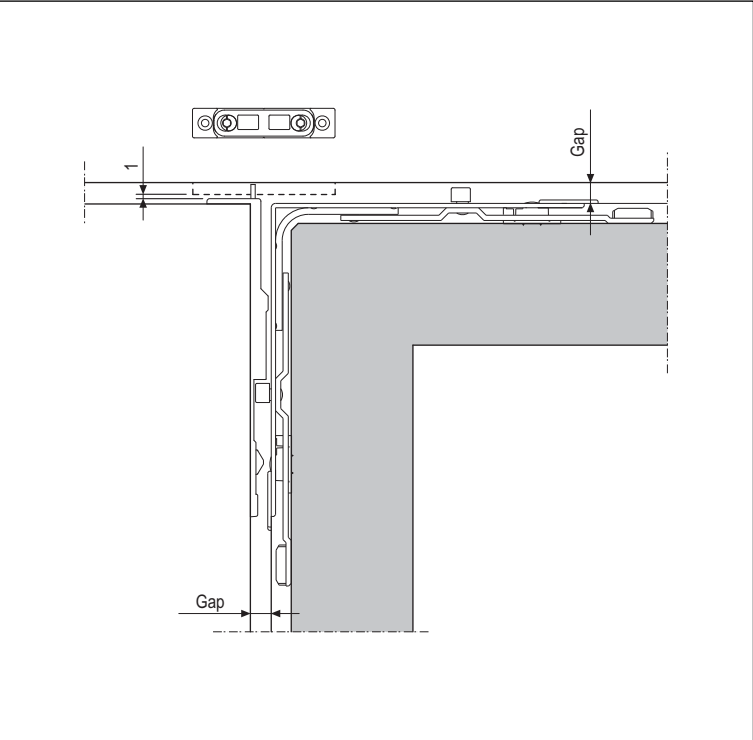

Screw hole position

GR1		
	B-A ref.	A-D ref.
1°	30	18,7
2°	173,5	-

Order Specifications

Article		
A40036.05.02	17X180X9,5	1