



Adjustable push rod strikers

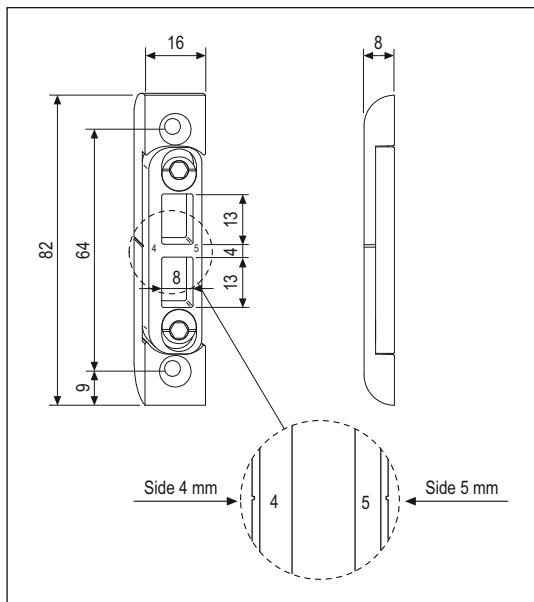

Gap 4 mm with 2 holes - 16x8 mm



Opening system	All double-sash windows
Adjustment	± 1 mm with 4 mm Allen wrench
Assembly	With pantograph (27 mm guide, 16 mm mill)
Material	Zamak
Mounting	Two 4x30 screws
Application	For systems that, because of the aluminium drip, do not have sufficient space for an 18 mm striker. For double sash windows where two push rods are installed (one on the main sash and one on the receiving sash)

NB. Jig art. A20030.01.27 is available for milling.

Order Specifications

Article	Applications	Dimensions mm	
A40017.01.07	2 holes	16x82x8	